

RAG ARIZONA GAIN

RETRO PROIEZIONE / REAR PROJECTION



Grigio / Grey


Lato gofrato verso il pubblico / Embossed side toward audience

CODICE CODE	LARGHEZZA WIDTH	LUNGHEZZA ROLL LENGTH	SPESSORE THICKNESS	COMPOSIZIONE COMPOSITION	PESO WEIGHT
RAG220P	220 cm	100 m	0,30 mm	100% PVC	405 g/m ²

REAZIONE AL FUOCO REACTION TO FIRE		IGNIFUGO PERMANENTE Film vinilico intrinsecamente resistente al fuoco e autoestinguente.	IFR - INHERENTLY FLAME RETARDANT Inherently flame resistant and self-extinguishing vinyl film.
--	--	--	--

CERTIFICATI DI IGNIFUGAZIONE FR CERTIFICATIONS		EN 13501-1 classe B s1 d0 UNI 9177 classe 1	EN 13501-1 class B s1 d0 UNI 9177 class 1
--	--	--	--

CARATTERISTICHE FEATURES	<ul style="list-style-type: none"> · Utilizzo: retro proiezione (tipico) e proiezione frontale · Opacità: traslucido · Guadagno max: 1,55 retro proiezione · Guadagno max: 0,38 proiezione frontale 	<ul style="list-style-type: none"> · Use: rear projection (typical) and front projection · Opacity: translucent · Peak gain: 1.55 rear projection · Peak gain: 0.38 front projection
------------------------------------	---	--

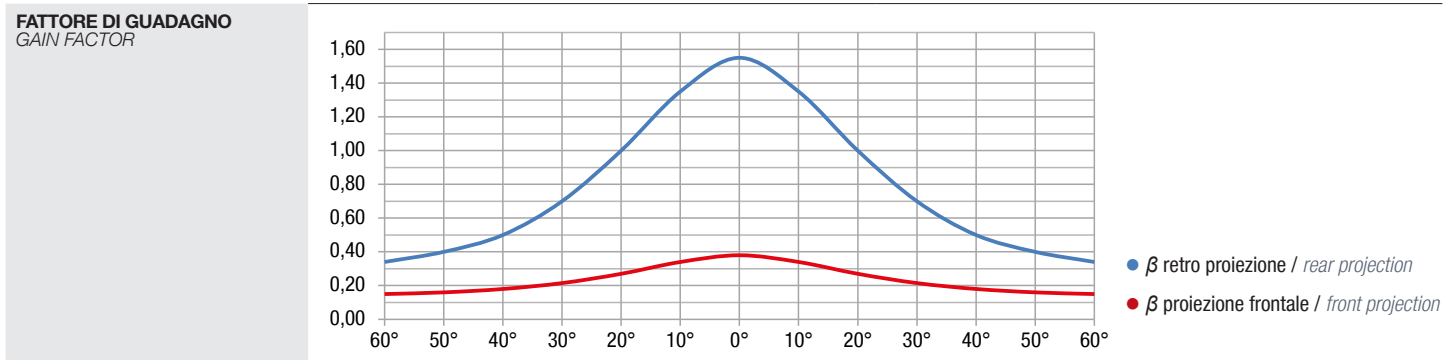

DISPONIBILITÀ AVAILABILITY	<ul style="list-style-type: none"> · A metro · Rotoli interi · Schermi realizzati su misura 	<ul style="list-style-type: none"> · By the metre · Full rolls · Custom manufactured screens
--------------------------------------	--	---

NOTE NOTES	La piegatura potrebbe causare piccoli segni bianchi (fenomeno irreversibile detto crazing), specialmente a basse temperature (< 15 °C).	Folding may cause small white marks (irreversible phenomenon called crazing), especially at low temperature (< 15 °C).
----------------------	---	--

